

## A2 Standard and Armored Indoor/Outdoor UV Rated Singlemode Bullet Jumper

Specifically designed to go from the outdoor NID to the indoor ONT. The Corning ClearCurve® LBL, Bend Insensitive glass allows for bending and stapling. The I/O jacket protects against UV and extreme weather. The bullet connector housing option allows for drilling smaller holes during installation and allows use of our bullet adapter and glow rod. Precision Group stocks Superior Flex jumpers in SCA-SCA of 25, 50, 75, 100 or 150ft lengths of 3mm, in standard or armored. We will be happy to make custom lengths and custom connector combinations per your specifications.



### FEATURES

CORNING CLEARCURVE®, LBL

INDOOR/OUTDOOR RATED

BEND INSENSITIVE AND STAPLE SAFE

3MM

OPTIONAL FIELD INSTALLABLE DETACHED CONNECTOR HOUSING

BLACK OR WHITE JACKET COLOR

RISER RATED

HELICAL STEEL ARMOR (ON ARMORED VERSION)

**Note: Optional Glow Rod Adapter Available (PF-BULLET-ADP)**




# A2 Standard and Armored Indoor/Outdoor UV Rated Singlemode Bullet Jumper

## ORDERING GUIDE


### A2 Indoor/Outdoor UV Rated Singlemode Bullet Jumper

Example Part #: PR104-30B-50B (Singlemode, SC/APC-SC/APC, 3.0mm, Black, 50 ft with Bullet Connector)

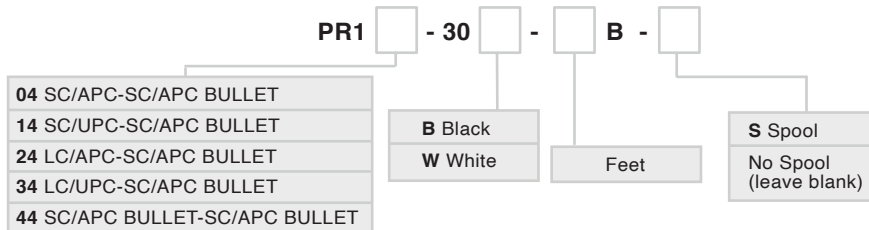

### A2 Armored Indoor/Outdoor UV Rated Singlemode Bullet Jumper

Example Part #: PRA104-30W-25B-S (Singlemode, SC/APC-SC/APC 3.0mm, White, 25ft with Bullet Connector, with Spool)

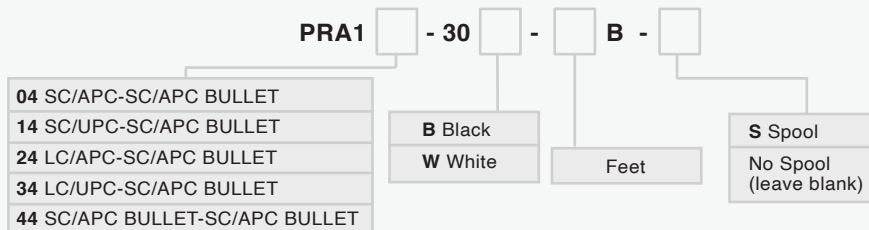

### B3 Indoor/Outdoor UV Rated Singlemode Bullet Jumper

Example Part #: PF304-30B-10B (Singlemode, SC/APC-SC/APC 3.0mm, Black, 10FT with Bullet Connector)

